

READY BOOSTER

THE **NEW** SINGLE POINT LUBRICATOR
FROM NTN-SNR



READY BOOSTER Benefits

- **Significant savings** due to the flexibility of use (1-12 months and stoppable)
- Suitable for **tight and restricted** areas (125 cm³)
- **Ready to use:** no assembly and no tools required
- Only one lubricator for **all of your applications:** inside and outside (-20°C up to 60°C)
- IP68 protection class: **Reliable lubrication** even in extremely moist and dusty areas

Applications

Due to its compact size, the Ready Booster can be used in various applications:

- Bearings, Plummer block
- Chains
- Electrical motors, fans, pumps, conveyors, etc.



> FOR YOUR APPLICATION, SELECT THE MOST SUITABLE GREASE FOR YOUR AUTOMATIC LUBRICATOR



UNIVERSAL +



HEAVY DUTY +



VIB



HIGH TEMP



CHAIN OIL



FOOD AL

DESCRIPTION

General purpose grease for industrial use

Suitable for very high loads, compatible with many applications, intended for arduous applications

Parts subject to extensive vibration or impacts. For high-load applications in humid environments

This grease is ideal for long-term lubrication at high temperatures up to 150°C, Accepts peaks of +175°C

Synthetic oil for high temperature chains

Multi-purpose grease for the food and pharmaceutical industries. Complies with NSF-H1 recommendations

APPLICATIONS

Agricultural equipment, handling equipment, general mechanical devices, low-power electric motors, etc.

Heavy industry: metallurgy, construction, transport, conveyors, lifting devices, water pumps, etc.

Quarries, cement plants, public works and humid environments: paper works, boring, crushers, vibrating scalpers, etc.

Textile machines, paper transformation machines, hot fans, dryers, water, pumps, etc.

Textile and plastic injection machines: For all type of oil lubricated chains

Bottling machines, dairy equipment, industrial baking, pasta manufacturing, confectionery, slaughterhouses, etc.

TECHNICAL DATA

Soap	Lithium Calcium	Lithium	Lithium Calcium	Polyurea		Aluminium complex
Oil	Mineral	Mineral	Semi-Synthetic	Semi-Synthetic	Ester + PAO	Mineral
Operating temperature	-25°C/+130°C	-30°C/+150°C	-20°C/+140°C	-40°C/+160°C	-20°C/+250°C	-25°C/+120°C
Viscosity at 40°C	100 cSt	150 cSt	360 cSt	160 cSt	320 cSt	250 cSt
Product name	Luber Ready Universal+	Luber Ready Heavy Duty+	Luber Ready VIB	Luber Ready High Temp	Luber Ready Chain Oil	Luber Ready Food AL*

* to be available shortly

Technical information

- Gas generating unit
- Reliable and economical
- Transparent cartridge
- Immediate activation (less than 1 day)

IP68 protection

Max. pressure 5 bars


Discharge period from 1 to 12 months

Stoppable


Capacity of 125 cm³

Operating temperatures: from -20°C up to +60°C

Several accessories available

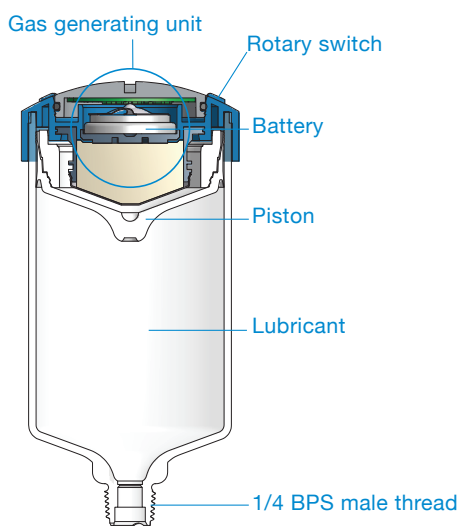

Oil-filled units with integrated oil retaining valve (red plug)



Rotary switch for discharge period setting

More information on our range www.ntn-snr.com

Experts
& Tools

NTN-SNR ROULEMENTS - www.ntn-snr.com - 1 rue des Usines - 74000 Annecy - France - Tel. +33 (0)4 50 65 30 00

S.A. au capital de 11 359 542 € - RCS ANNECY B 325 821 072 - Id. Fiscale : FR 48 325 821 072 - SIRET 325 821 072 00015 - Code APE 2815 Z

NTN **SNR**